


Wiertła do metalu (NWKa ▪ DIN 338) z chwytem walcowym HSSCo – kobaltowe, szlifowane (wiertła kobaltowe 5%)

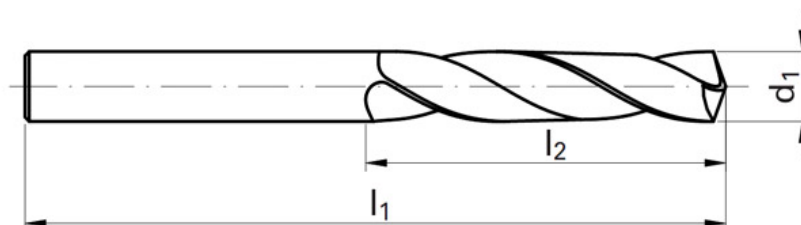

D_1 [mm]	L_1 [mm]	L_2 [mm]
0.5	22	6
1.0	34	12
1.1	36	14
1.2	38	16
1.3		
1.4	40	18
1.5		
1.6	43	20
1.7		
1.8	46	22
1.9		
2.0	49	24
2.1		
2.2	53	27
2.3		
2.4	57	30
2.5		
2.6	61	33
2.7		
2.8	65	36
2.9		
3.0	70	39
3.1		
3.2	75	43
3.3		
3.4		
3.5		
3.6		
3.7		
3.8		
3.9		
4.0		

4.1	75	43
4.2		
4.3		
4.4		
4.5		
4.6	80	47
4.7		
4.8		
4.9		
5.0		
5.1	86	52
5.2		
5.3		
5.4		
5.5		
5.6	93	57
5.7		
5.8		
5.9		
6.0		
6.1	101	63
6.2		
6.3		
6.4		
6.5		
6.6	109	69
6.7		
6.8		
6.9		
7.0		
7.1	117	75
7.2		
7.3		
7.5		
7.6		
7.7	125	81
7.8		
7.9		
8.0		
8.1		
8.2		
8.3		
8.4		
8.5		
8.6		
8.7		

8.8		
8.9		
9.0		
9.1	125	81
9.2		
9.5		
9.7		
9.8		
9.9		
10.0	133	87
10.1		
10.2		
10.3		
10.5		
10.8		
11.0		
11.2	142	94
11.5		
11.8		
12.0		
12.2		
12.5	151	101
12.8		
13.0		
13.5	160	108
14.0		
14.5	169	114
15.0		
15.5	178	120
16.0		
16.5	184	125
17.0		
17.5	191	130
18.0		
18.5	198	135
19.0		
19.5	205	140
20.0		